


## FRONT AXLE

### DESCRIPTION

Tapered roller bearings are used for the front wheel bearings.

The preload of the bearing can be determined only by tightening the axle hub nut to a specified torque.

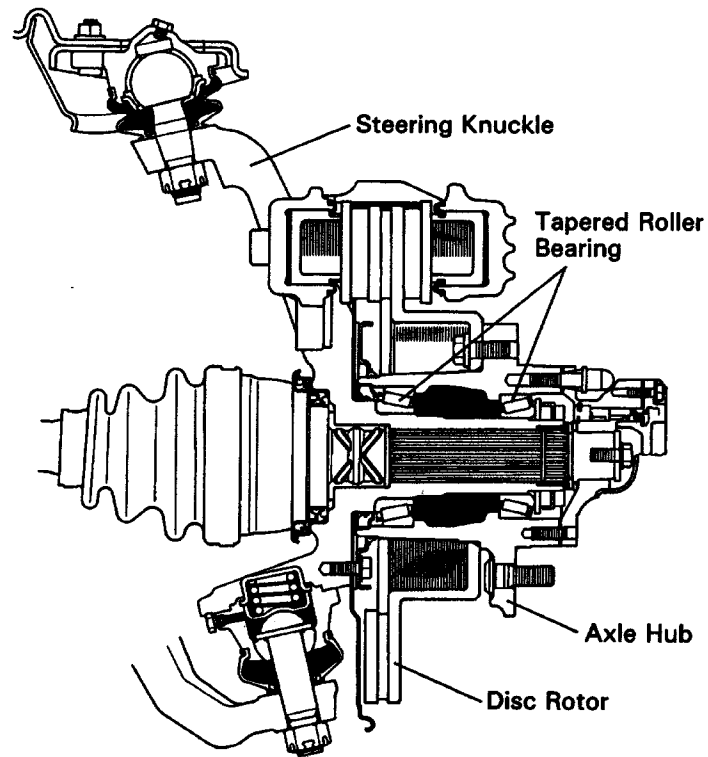

R04782