

EGR GAS TEMPERATURE SENSOR

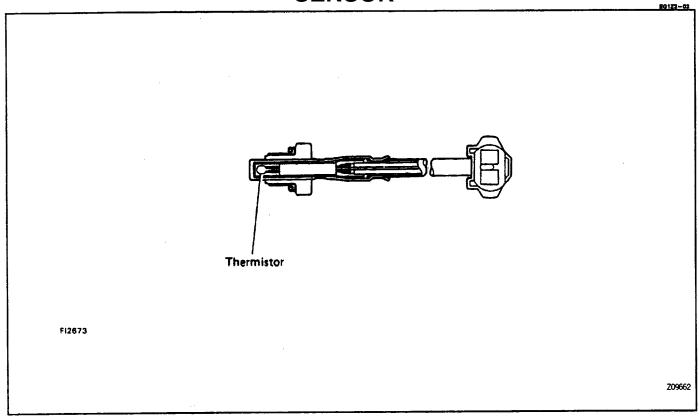

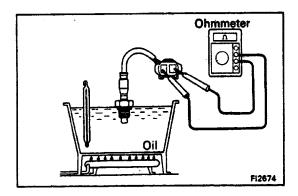

EGR GAS TEMP. SENSOR INSPECTION

MEASURE RESISTANCE OF EGR GAS TEMP. SENSOR

Using an ohmmeter, measure the resistance between both terminals.

Resistance:

At 50°C (122°F): $69 - 89 \text{ k}\Omega$ At 100°C (212°F): $11 - 15 \text{ k}\Omega$ At 50°C (302°F): $2 - 4 \text{ k}\Omega$

If the resistance is not as specified, replace the sensor.